

The Micromag HP/50 has all the same benefits of the standard Micromag but has been developed to suit high pressure through spindle-coolant applications, where the smallest of particles can damage seals, spindles and even reduce the efficiency of the cutting tool.

Micromag HP/50 can be installed anywhere in the fluid delivery system and will ensure that even sub-micron magnetic and para-magnetic particles are removed before they can cause any expensive damage.

For further information relating to the benefits and operation of the Micromag HP/50 please refer to the supplied standard Micromag brochure.

Cleaning

Using the supplied cleaning tool, a fully contaminated core can be cleaned in under 30 seconds. Only metallic particles are removed from the filter and these can be easily disposed. There are no dirty cartridges!



Suitable Products

Neat & soluble oils.

Installation Location

Pre or post pump, delivery line, spindle feed or pre membrane cartridge.


Benefits

- High pressure
- Sub micron filtration
- Large holding capacity
- High intensity rare earth magnetic material
- Suitable for all machining applications
- Environmentally responsible
- No consumables

Category

High Pressure.



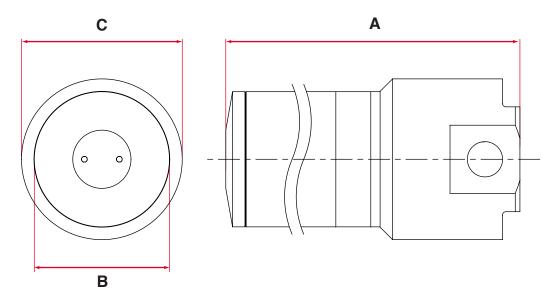

Product Information

Product number	Flow rate	Contamination capacity	Max. operating pressure	Connection	Temperature range	Weight	Construction	Dimensions mm		
	Itrs/min.	kgs	bar	" BSP	°C	kgs		Α	В	С
MM5/HP/50	70	1	50	1	0 – 140	6.27	Full aluminum construction	247	116	125
MM10/HP/50	100	2	50	1	0 – 140	8.4		365	116	125
MM20/HP/50	150	4	50	1½	0 – 140	21.5		625	116	125

Performance

Maximum Pressure 50 Bar

Magnetic Performance: High Intensity

Circuit Design: Open

Magnetic Material: Rare Earth Neodymium Iron Boron

Magnet Grade: N35SH – Inspected & confirmed via hystergraph prior to use

Temperature: 0 - 140°C

Materials

Housing: Aluminium Lid: Aluminium

Tube:304 Grade stainless steelSurface:Finish Machined and anodised

Sealing: Viton O-ring

Options

Core cleaning post Mounting bracket Port adaptors

If you have any more questions, require technical assistance or would like a quotation, please contact us.

www.eclipsemagnetics.com

Eclipse Magnetics Ltd

Atlas Way, Sheffield, S4 7QQ, England **T** +44 (0)114 225 0600 **F** +44 (0)114 225 0525
info@eclipsemagnetics.com www.eclipsemagnetics.com

While every effort has been made to ensure the accuracy of the information in this publication please note that specifications may change without notice.





